

Broadband low noise amplifier

BBA2-sma

20MHz to 2500MHz

Features

- PCB sub assembly
- high gain from 20MHz to 2.5GHz, 50 ohm
- 10v – 15v DC with reverse polarity protection

Applications

- VHF/UHF
- noise generator amplifier

Electrical specification at 20°C

model	Frequency (MHz)		Gain (dB)	Noise figure (dB)	Gain flatness (±dB)	-1dB compression typical (dBm)	DC power	
	min	max					V	mA
BBA2-sma	20	2500	>32	<5.5	<2	>+12	+10 to 15	<110

Continental Compliance Ltd

Registered in England and Wales No 02856093

35 Highfield Way, North Ferriby, East Yorkshire, HU14 3BG, UK.


Telephone +44 (0)1482 631558.

Application notes available at www.g8fek.com

Maximum ratings



Storage temperature	-30°C to +70°C
Operating temperature	-10°C to +50°C
DC Voltage	+16.0V
Input port power	+20dBm

PCB dimensions: 30mm by 30mm

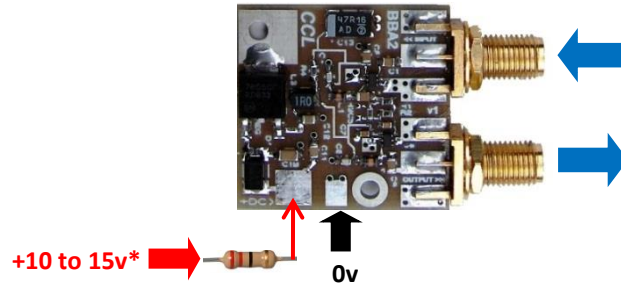

* use the supplied 22R 1W resistor in series with the positive supply

Typical measured performance from production sample:

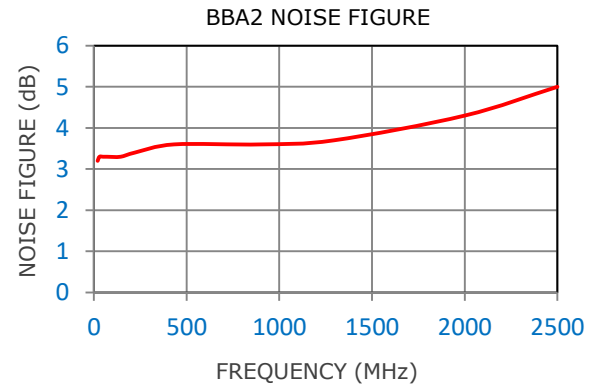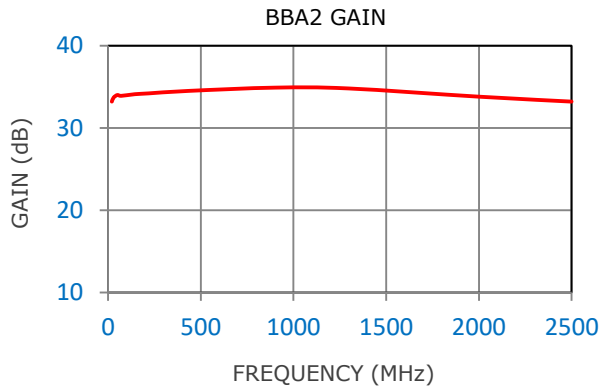

Continental Compliance Ltd

Registered in England and Wales No 02856093

35 Highfield Way, North Ferriby, East Yorkshire, HU14 3BG, UK.

Telephone +44 (0)1482 631558.

Application notes available at www.g8fek.com